

Digital indicator with relay outputs PMT-920

- ✓ Input Pt100, Pt500, Pt1000 or K, S, J, T, N, R, B, E
- ✓ 2 settable relay outputs: 1 A, 250 V AC
- ✓ Power supply 85...260 v AC/DC

Functions and use



Programmable indicator PMT-920 is applicable to cooperation with the temperature sensors. Indicator works with resistance sensor Pt (PMT-920/R) or thermocouples type K, S, J, T, N, R, B, E (PMT-920/U). PMT-920/R can be connected with 2-, 3- or 4- wire sensors. Indicator recognize 3- and 4- wire sensors and compensate line resistance automatically. Two alarm values controlling the relay outputs can be programmed. Diodes on the front of the indicator indicate the exceeding of the alarm values. The relay outputs have a pair of operating contacts.

PMT-920 meters enables the following parameters to be programmed:

- ◆ level and hysteresis of action of relays;
- ◆ state of contact during alarm;
- ◆ password restricting access to the programming menu;
- ◆ display filtering level.
- ◆ color of display (green or red).



External dimensions

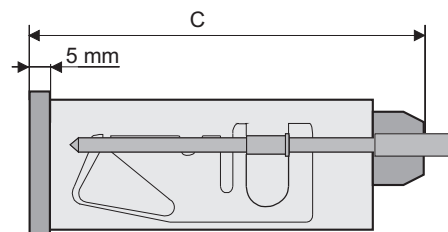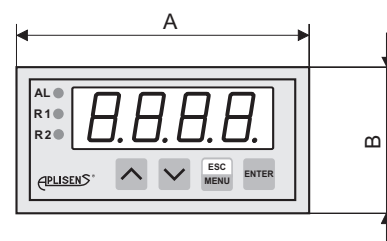

(A=72mm , B=36mm , C=100mm)
Dimensions of panel cut-out 67mm × 32,5mm

	Technical data
Input signal	Pt100, Pt500, Pt1000 – PMT-920/R K, S, J, T, N, R, B, E – PMT-920/U
Display range	-999 to 9999
Indication range	Pt: -100...600°C K: -200...1370°C S: -50...1768°C J: -210...1200°C T: -200...400°C N: -200...1300°C R: -50...1768°C B: 250...1820°C E: -200...1000°C
Display error	0,25% ± 1 digit
Resolution	0,1°C for PMT-920/R 1°C for PMT-920/UR
Relay outputs	2 1 A, 250 V AC, cosφ=1
Power supply	85...260V AC/DC
Integrated power supply:	24 V DC stab., max. 100 mA
Operating temperature	0...50°C (special version -20...50°C)
Storage temperature	-10...70°C (special version -20...70°C)
Display size:	LED 4x13mm
Casing	panel type IP 40 (from the front) IP 20 (from the terminals)

Ordering procedure

PMT-920 / /

Input:
R - (Pt100, Pt500, Pt1000)
U - (K, S, J, T, N, R, B, E)

Special version:
-20°C - operating and storage temperature starts from -20°C